

# CER7052B



■ Features

- Cost competitive shielded type inductor
- SMD magnetic shielded type of power inductor
- Suitable for power supply choke coil
- Construction for high current
- Operating temperature : -40°C~+125°C(The self-heating is included)

Magnetic structure :




Weight : 0.89 g

■ Applications


- Audio Visual/Camera,Recorder,TV and Monitor,Mini System, AV Amplifier, for Professionals
- Computer & Peripheral Device/Industrial Machines,Computer,Printer(MFP)
- Home Electronics/LED Lights
- Others/Medical,Energy,Power Supply,Transceivers,FA

■ Dimensions

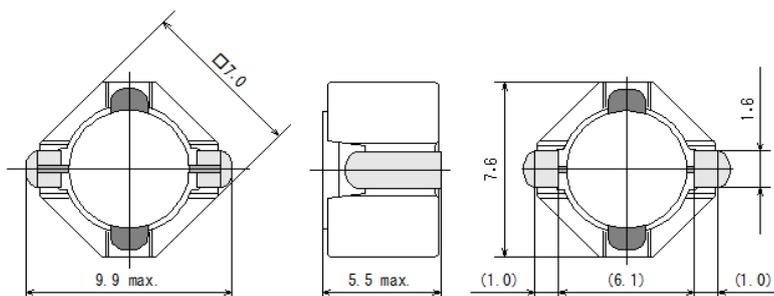

(Unit : mm)

■ Recommended Land Pattern

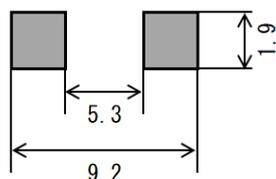

(Unit : mm)



SAGAMI ELEC CO., LTD.  
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan  
 Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp  
 Engineering Dept. TEL : +81 45 521 4543

⚠ The contents of this catalogue are subject to change without notice.

## ■ Specifications

SAGAMI Part No.	Inductance ( $\mu$ H)	DCR ( $\Omega$ ) $\pm 30\%$	DC Saturation Allowable Current (A)		Temperature Rise Allowable Current (A)	
			Typical	Spec	Typical	Spec
			CER7052B-1R2N	1.2 $\pm 30\%$	0.0090	9.50
CER7052B-1R8N	1.8 $\pm 30\%$	0.0100	8.05	5.80	5.90	4.20
CER7052B-2R2N	2.2 $\pm 30\%$	0.0120	7.00	4.95	5.50	4.00
CER7052B-3R0N	3 $\pm 30\%$	0.0130	6.10	4.30	5.10	3.80
CER7052B-3R6N	3.6 $\pm 30\%$	0.0150	5.50	3.90	4.80	3.60
CER7052B-4R3N	4.3 $\pm 30\%$	0.0160	4.95	3.45	4.55	3.30
CER7052B-5R1N	5.1 $\pm 30\%$	0.0180	4.65	3.30	4.30	3.10
CER7052B-6R2N	6.2 $\pm 30\%$	0.0200	4.20	3.00	4.15	2.95
CER7052B-7R5N	7.5 $\pm 30\%$	0.0210	3.90	2.80	3.95	2.80
CER7052B-8R2N	8.2 $\pm 30\%$	0.0260	3.55	2.55	3.60	2.60
CER7052B-100M	10 $\pm 20\%$	0.0320	3.40	2.40	3.30	2.40
CER7052B-120M	12 $\pm 20\%$	0.0410	3.00	2.15	2.85	2.05
CER7052B-150M	15 $\pm 20\%$	0.0470	2.70	1.90	2.65	1.90
CER7052B-180M	18 $\pm 20\%$	0.0590	2.45	1.75	2.40	1.75
CER7052B-220M	22 $\pm 20\%$	0.0720	2.20	1.55	2.10	1.55
CER7052B-270M	27 $\pm 20\%$	0.0870	1.95	1.40	1.90	1.40
CER7052B-330M	33 $\pm 20\%$	0.110	1.80	1.30	1.75	1.30
CER7052B-390M	39 $\pm 20\%$	0.120	1.60	1.15	1.60	1.15
CER7052B-470M	47 $\pm 20\%$	0.150	1.50	1.10	1.45	1.05
CER7052B-560M	56 $\pm 20\%$	0.180	1.40	1.00	1.30	0.970
CER7052B-680M	68 $\pm 20\%$	0.220	1.25	0.897	1.20	0.870
CER7052B-820M	82 $\pm 20\%$	0.250	1.10	0.807	1.10	0.800
CER7052B-101M	100 $\pm 20\%$	0.320	1.00	0.730	0.980	0.730
CER7052B-121M	120 $\pm 20\%$	0.370	0.970	0.683	0.910	0.660
CER7052B-151M	150 $\pm 20\%$	0.460	0.860	0.600	0.800	0.580
CER7052B-181M	180 $\pm 20\%$	0.580	0.790	0.550	0.720	0.520
CER7052B-221M	220 $\pm 20\%$	0.690	0.720	0.500	0.650	0.470
CER7052B-271M	270 $\pm 20\%$	0.860	0.640	0.450	0.580	0.420
CER7052B-331M	330 $\pm 20\%$	0.980	0.570	0.403	0.550	0.390
CER7052B-391M	390 $\pm 20\%$	1.21	0.520	0.365	0.480	0.350
CER7052B-471M	470 $\pm 20\%$	1.56	0.470	0.333	0.420	0.310
CER7052B-561M	560 $\pm 20\%$	1.75	0.440	0.307	0.390	0.290
CER7052B-681M	680 $\pm 20\%$	2.20	0.400	0.282	0.350	0.260
CER7052B-821M	820 $\pm 20\%$	2.44	0.360	0.259	0.330	0.250
CER7052B-102M	1000 $\pm 20\%$	3.19	0.330	0.227	0.290	0.212

Inductance Measuring Condition:100kHz,1V

DC saturation allowable current:The current value which inductance decrease within 30% from the initial value

Temperature rise allowable current:The rise in temperature of core surface is within 40°C









SAGAMI ELEC CO., LTD.  
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan  
 Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp  
 Engineering Dept. TEL : +81 45 521 4543

The contents of this catalogue are subject to change without notice.

# DC bias characteristics vs Temperature Rise Graph







■ L(25°C)      ■  $\Delta T$

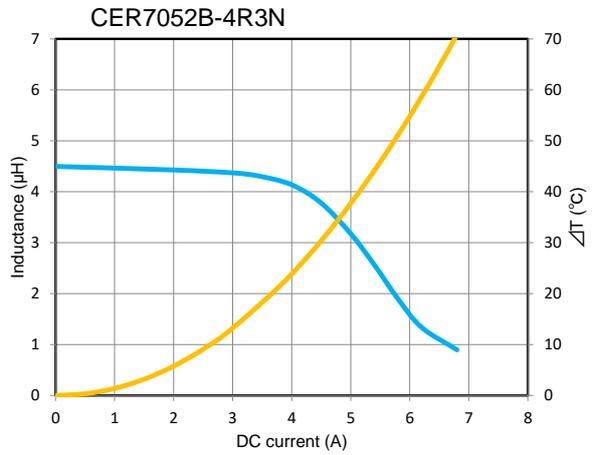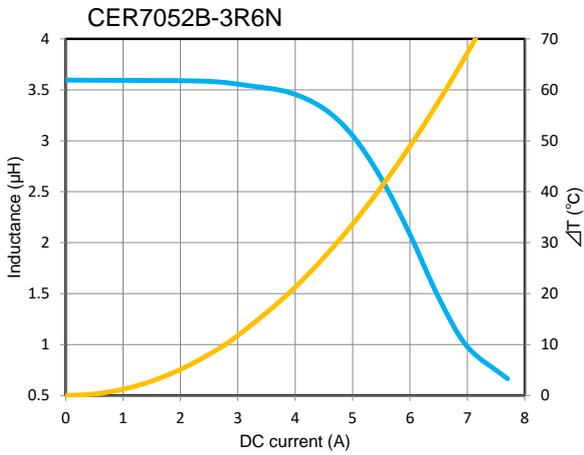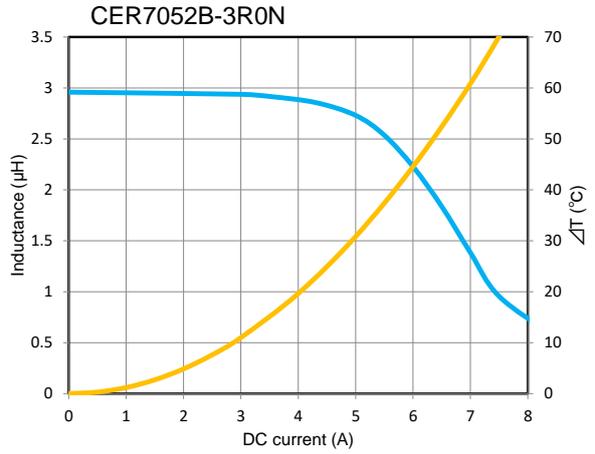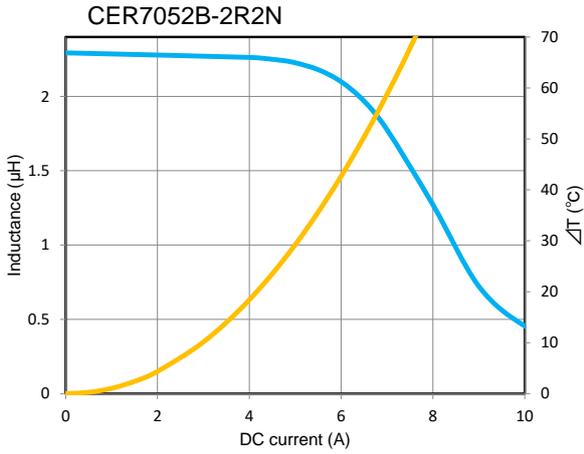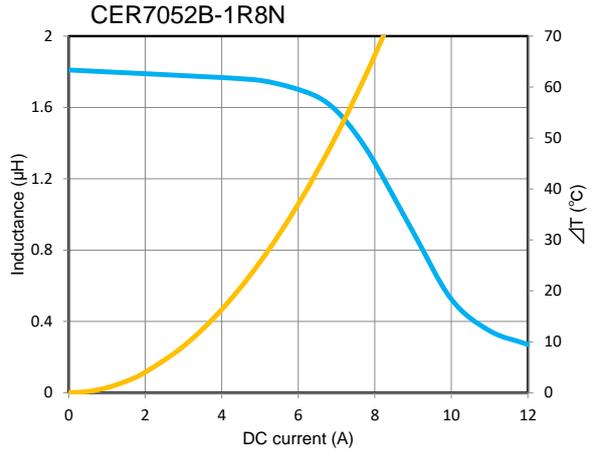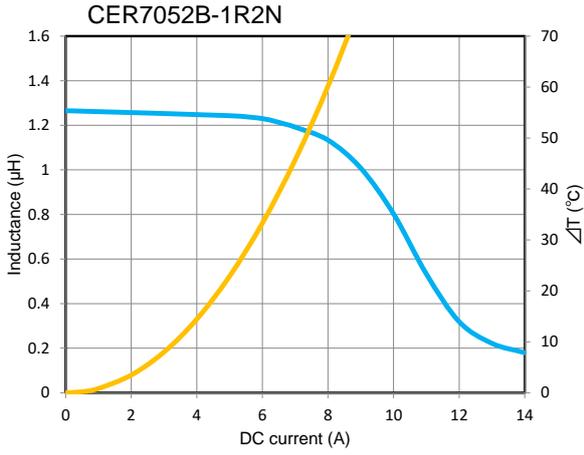

# DC bias characteristics vs Temperature Rise Graph

 L(25°C)







  $\Delta T$

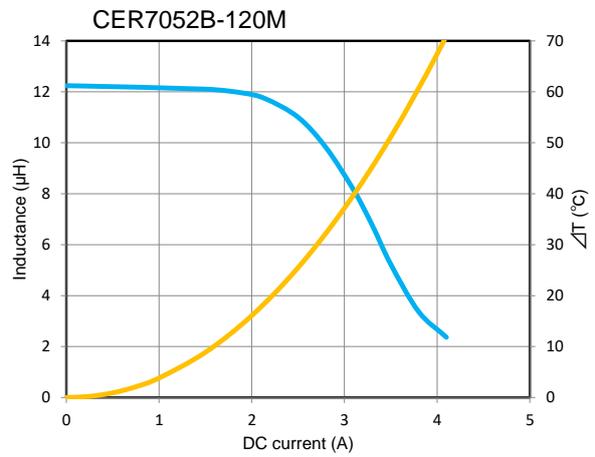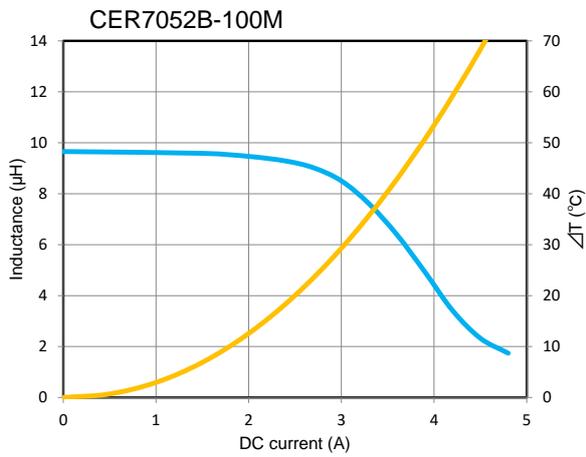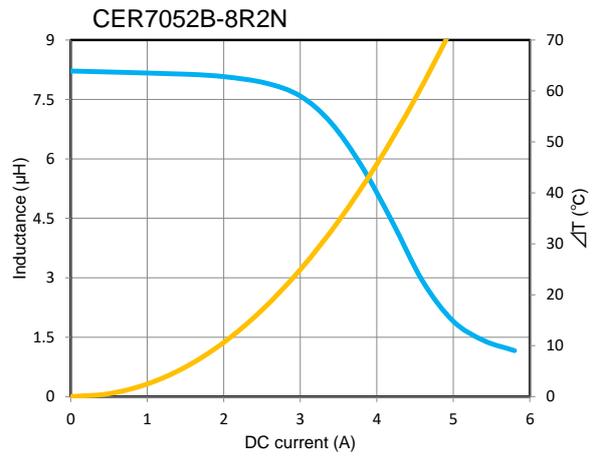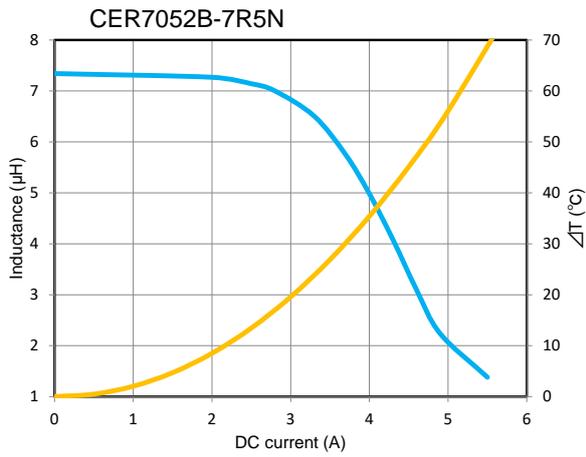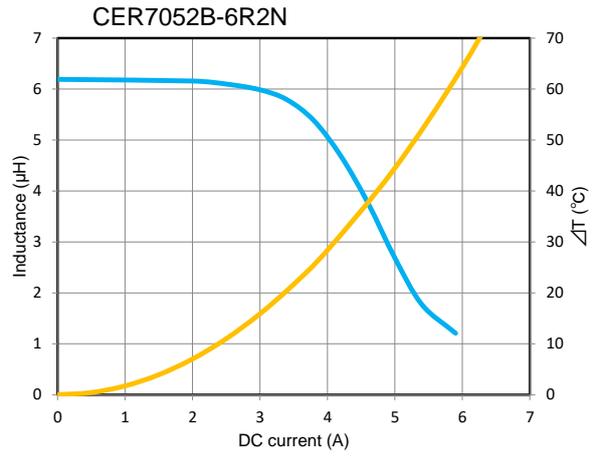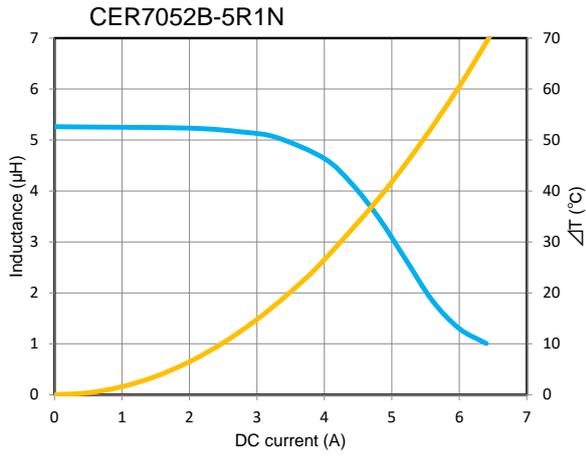

# DC bias characteristics vs Temperature Rise Graph

 L(25°C)







  $\Delta T$

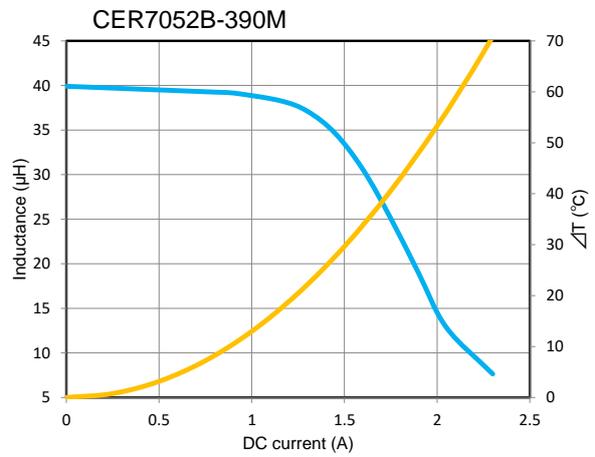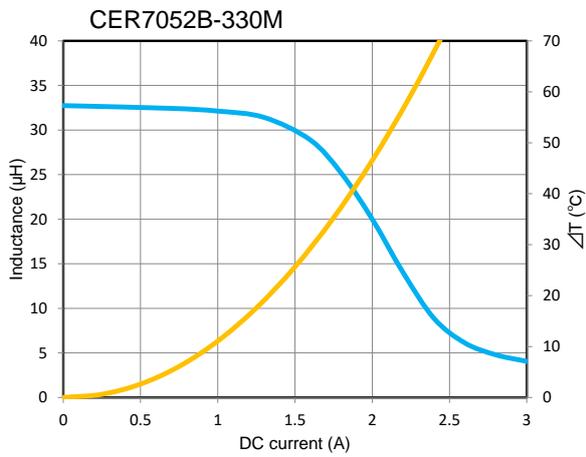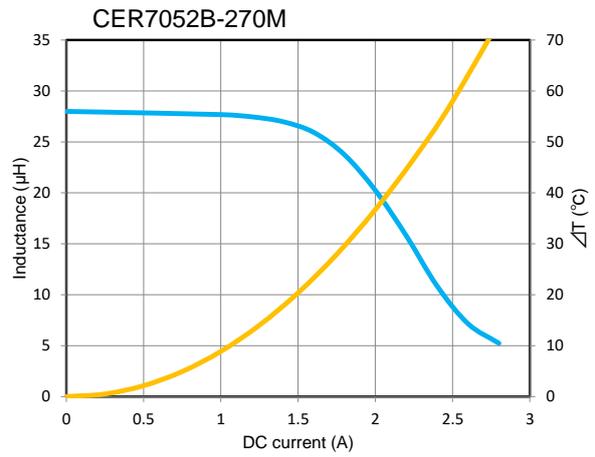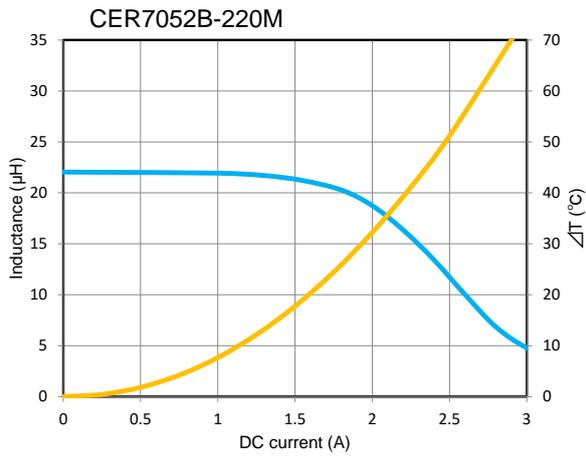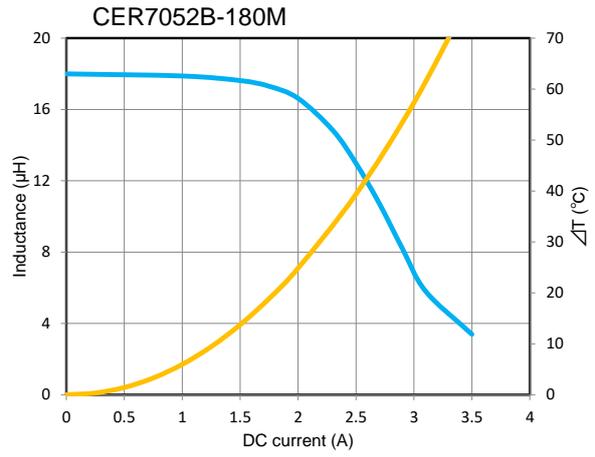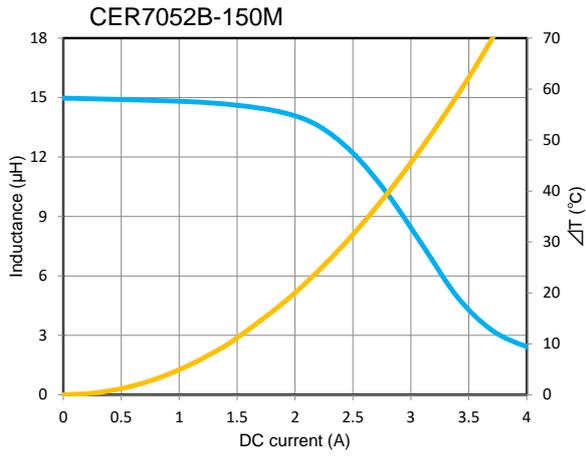

# DC bias characteristics vs Temperature Rise Graph

 L(25°C)

  $\Delta T$

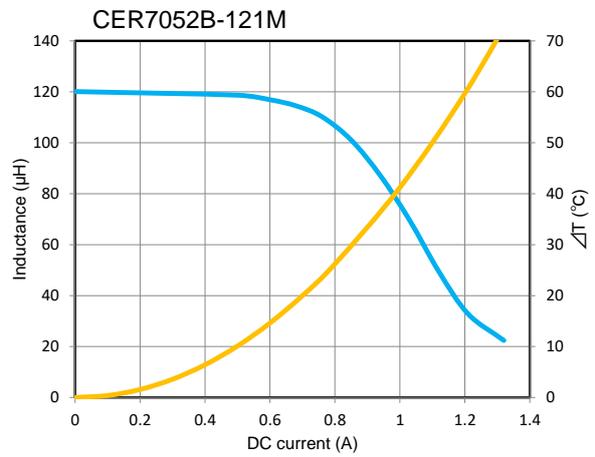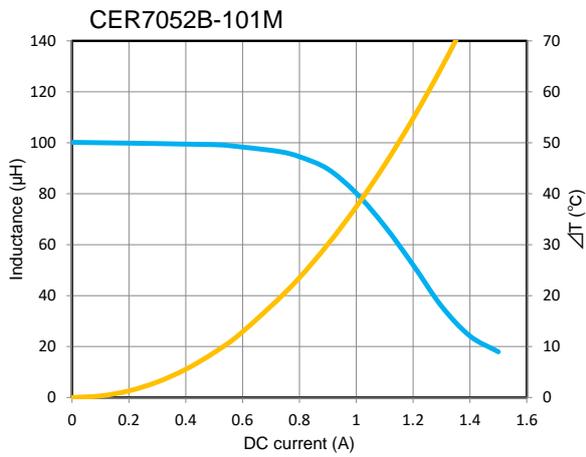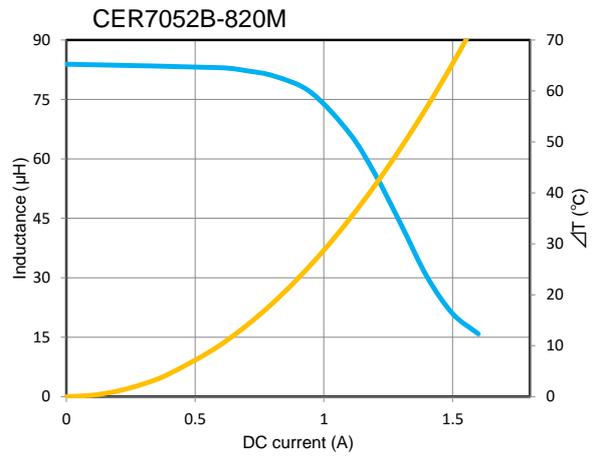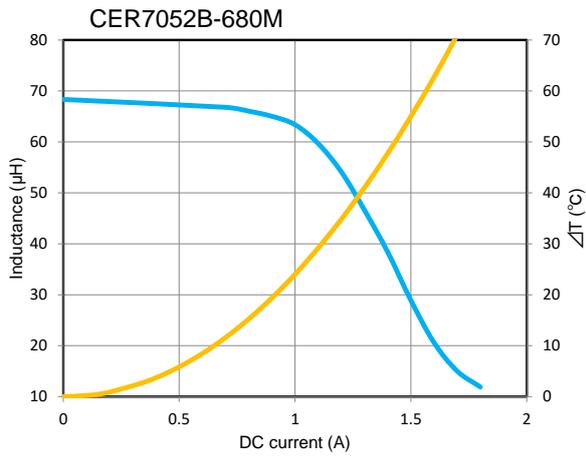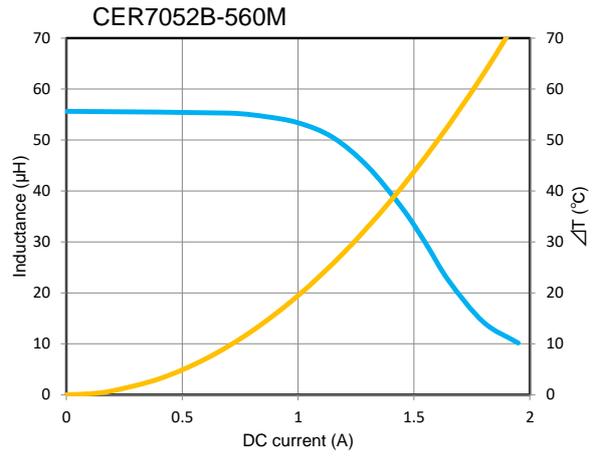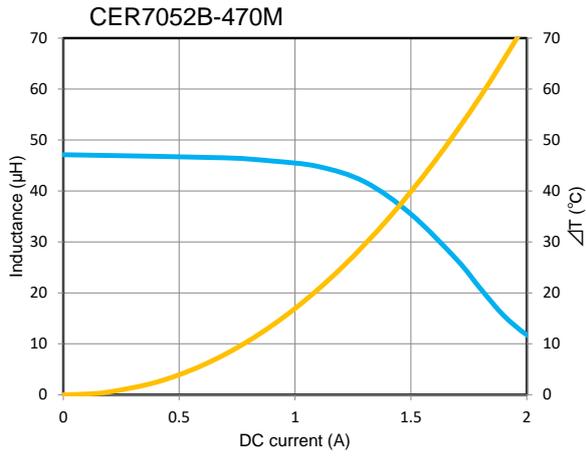







# DC bias characteristics vs Temperature Rise Graph



L(25°C)



$\Delta T$

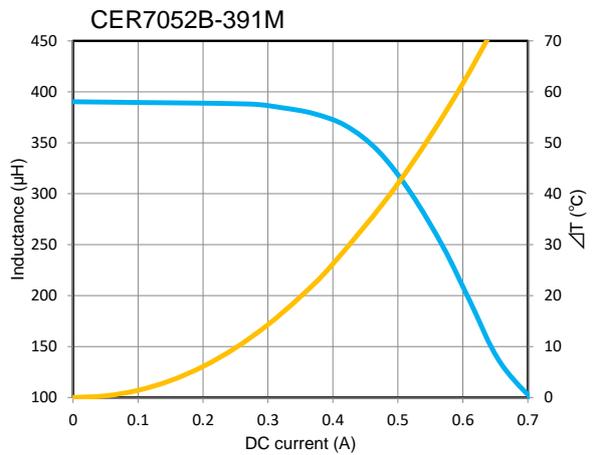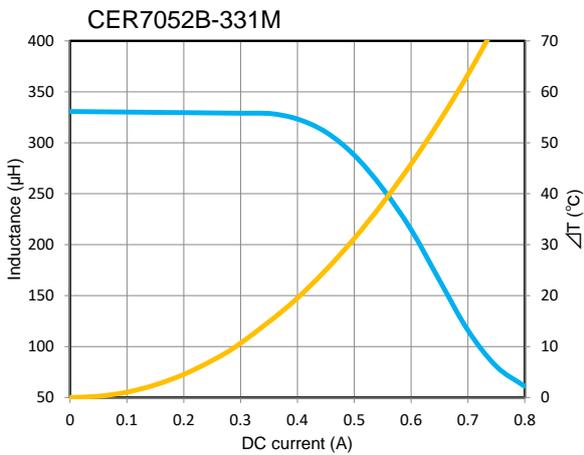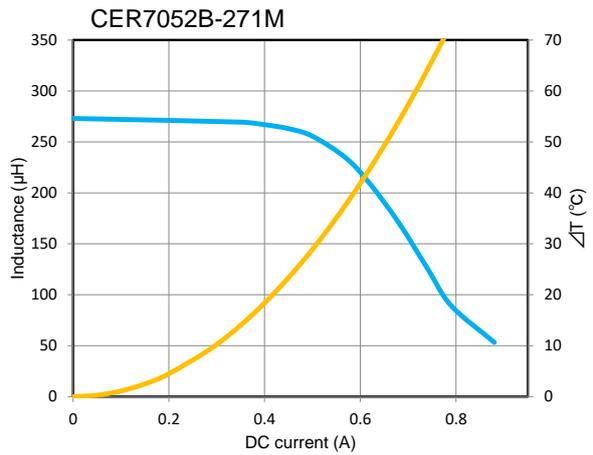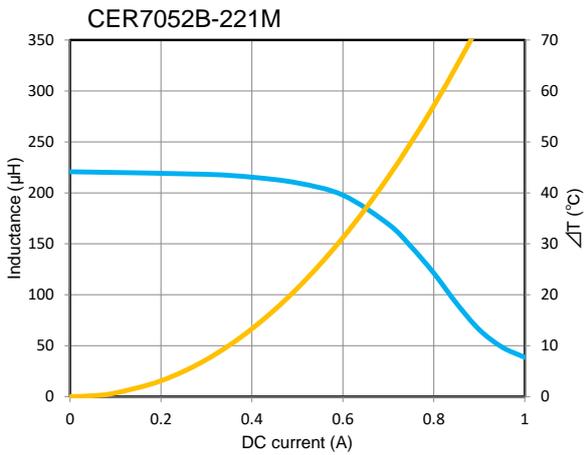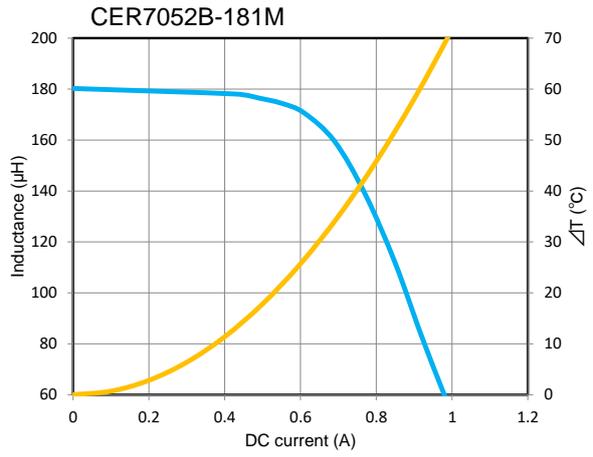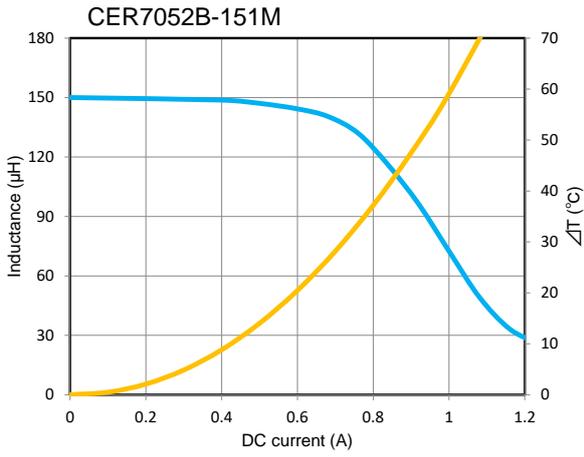

# DC bias characteristics vs Temperature Rise Graph

 L(25°C)

  $\Delta T$

