


CVE3527M

New Products

RoHS


AEC-Q200

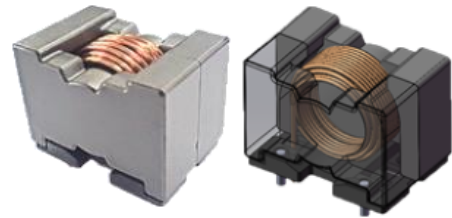

■ Features

- Power inductor with greatly improved current characteristics
- Closed magnetic circuit structure with low leakage flux

■ Magnetic structure




Operating Temperature Range : -40 °C~ +150 °C(include self-heating)

Weight : 95.0 g

■ Application

- AudioVisual
Mini component, AV amplifier, Amplifier for profes
- Automotive
Car Audio, ECU
- Home Electronics
White goods
- Others
Power Supply, FA, Medical, Energy

■ Dimensions

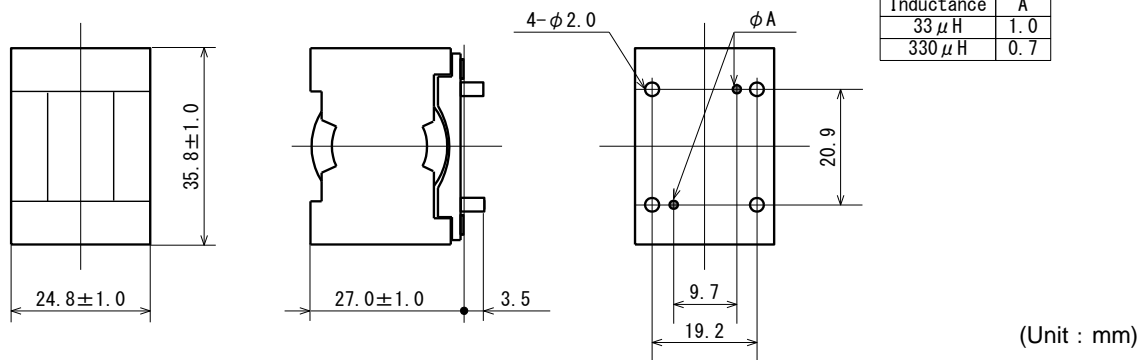

■ Connection (Bottom view)



SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
 Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
 Engineering Dept. TEL : +81 45 521 4543


⚠ The contents of this catalogue are subject to change without notice.

■ Specifications


SAGAMI Part No.	Inductance (μ H)	DCR Resistance (m Ω) max.	Rated current	
			DC saturation allowable current (A)	Temperature rise allowable current (A)
CVE3527M-330M	33 \pm 20%	16.0	24.0	14.0
CVE3527M-331M	330 \pm 20%	145	9.00	4.60
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

- Inductance Measuring Condition : 100kHz,1V
- Rated current : DC saturation allowable current or Temperature rise allowable current, whichever is smaller.
 1. DC saturation allowable current : value of inductance decrease 10%.
 2. Temperature rise allowable current : A rise in temperature of core surface is 40°C.

■ Characteristics of DC Saturation Current

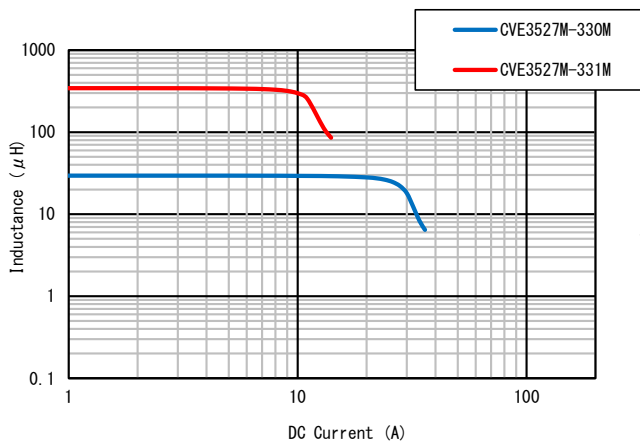

■ Characteristics of Temperature rise

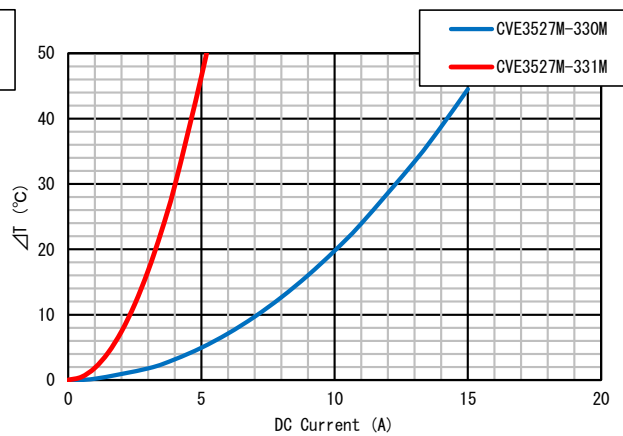

SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
 Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
 Engineering Dept. TEL : +81 45 521 4543

⚠ The contents of this catalogue are subject to change without notice.