

DBE7210H



■ Features

- The optimal design realizes high quality sound and low distortion
- Compact size using flat wire (using OFC wire)
- Small size and SMD type, Magnetic-shielded
- High current, Low resistance

Magnetic structure :




Weight : 2.5 g

■ Applications


- Audio Visual/Mini System, AV Amplifier, for Professionals,TV and Monitor
- Home Electronics/Games
- Others/Power Supply
- Operating temperature : -40°C~+125°C(The self-heating is included)

■ Dimensions

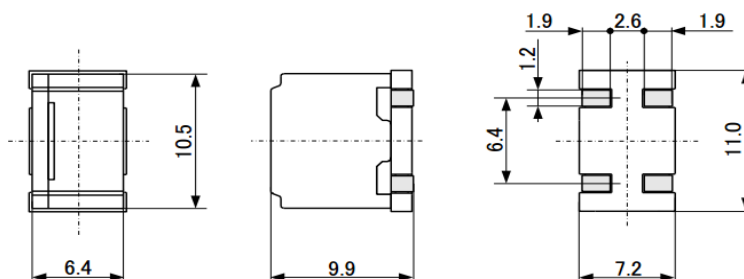

(Unit : mm)

■ Recommended Land Pattern



(Unit : mm)



SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
Engineering Dept. TEL : +81 45 521 4543

The contents of this catalogue are subject to change without notice.

■ Specifications

SAGAMI Part No.	Inductance (μ H)	DCR (m Ω)		DC Saturation Allowable Current (A)	Temperature Rise Allowable Current (A)
		max.	Typical		
DBE7210H-100M	10 \pm 20%	23.0	18.0	6.00	3.60
DBE7210H-150M	15 \pm 20%	27.0	21.0	5.00	3.50
DBE7210H-220M	22 \pm 20%	38.0	29.0	4.30	3.00

Inductance Measuring Condition:1kHz,1V

DC saturation allowable current:The current value which inductance decrease within 25% from the initial value

Temperature rise allowable current:The rise in temperature of core surface is within 40°C



SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
 Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
 Engineering Dept. TEL : +81 45 521 4543

The contents of this catalogue are subject to change without notice.