

DVH2523B



■ Features

- High current
- Magnetic shielded type
- Low DCR, High current
- Operating temperature : -40°C~+125°C(The self-heating is included)

Magnetic structure :




Weight : 27.6 g

■ Applications

- Audio Visual/Mini System, AV Amplifier, for Professionals
- Others/Power Supply

■ Dimensions

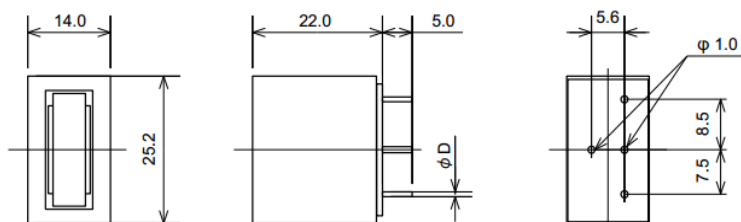

(Unit : mm)



SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
Engineering Dept. TEL : +81 45 521 4543

The contents of this catalogue are subject to change without notice.

■ Specifications

SAGAMI Part No.	Inductance (μ H)	DCR (m Ω)		DC Saturation Allowable Current (A)	Temperature Rise Allowable Current (A)
		max.	Typical		
DVH2523B-100N	10 $\pm$ 30%	20.0	14.3	26.3	6.90
DVH2523B-150N	15 $\pm$ 30%	25.0	17.9	21.5	6.10
DVH2523B-200M	20 $\pm$ 20%	28.0	20.2	20.0	5.80
DVH2523B-330M	33 $\pm$ 20%	47.1	33.6	15.8	4.50

Inductance Measuring Condition:100kHz,1V

DC saturation allowable current:The current value which inductance decrease within 25% from the initial value

Temperature rise allowable current:The rise in temperature of core surface is within 40°C



SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
 Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
 Engineering Dept. TEL : +81 45 521 4543

The contents of this catalogue are subject to change without notice.