

HER1090



■ Features

- High current
- SMD magnetic shielded type of power inductor.
- Suitable for power supply choke coil.
- Operating temperature : -40°C~+125°C(The self-heating is included)

Magnetic structure :




Weight : 3.1 g

■ Applications


- Audio Visual/TV and Monitor, Portable Audio, Camera
- Computer & Peripheral Device/Printer(MFP), Computer
- Others/Energy, Power Supply, Transceivers, FA, Medical

■ Dimensions

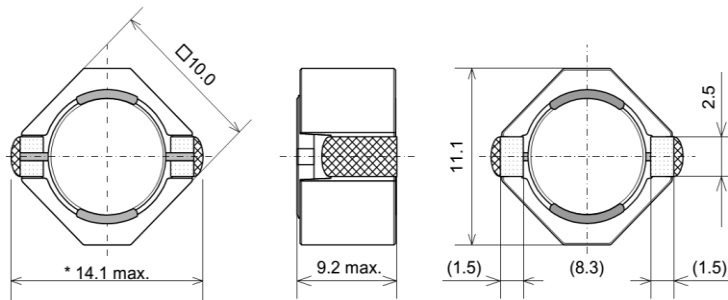

(Unit : mm)

■ Recommended Land Pattern



(Unit : mm)



SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
Engineering Dept. TEL : +81 45 521 4543

⚠ The contents of this catalogue are subject to change without notice.

■ Specifications

SAGAMI Part No.	Inductance (μ H)	DCR (Ω) $\pm 30\%$	DC Saturation Allowable Current (A)		Temperature Rise Allowable Current (A)	
			Typical	Spec	Typical	Spec
HER1090-1R1N	1.1 $\pm 30\%$	0.00600	25.7	19.0	9.30	7.40
HER1090-1R8N	1.8 $\pm 30\%$	0.00800	20.5	14.2	8.30	6.50
HER1090-2R7N	2.7 $\pm 30\%$	0.00900	18.5	13.0	7.60	6.00
HER1090-3R3N	3.3 $\pm 30\%$	0.0110	15.3	11.5	7.00	5.60
HER1090-4R7N	4.7 $\pm 30\%$	0.0130	14.4	9.90	6.40	5.00
HER1090-5R6N	5.6 $\pm 30\%$	0.0140	12.5	9.00	6.20	4.85
HER1090-6R8N	6.8 $\pm 30\%$	0.0160	10.9	8.20	5.80	4.60
HER1090-8R2N	8.2 $\pm 30\%$	0.0180	10.6	7.00	5.40	4.30
HER1090-100M	10 $\pm 20\%$	0.0190	8.90	6.40	5.30	4.20
HER1090-150M	15 $\pm 20\%$	0.0230	7.65	5.20	4.80	3.80
HER1090-220M	22 $\pm 20\%$	0.0330	6.65	4.40	4.00	3.40
HER1090-330M	33 $\pm 20\%$	0.0590	5.20	3.50	3.00	2.60
HER1090-470M	47 $\pm 20\%$	0.0960	4.30	3.00	2.40	1.85
HER1090-680M	68 $\pm 20\%$	0.130	3.50	2.45	2.10	1.62
HER1090-820M	82 $\pm 20\%$	0.160	3.20	2.25	1.80	1.42
HER1090-101M	100 $\pm 20\%$	0.210	3.00	1.95	1.60	1.24
HER1090-151M	150 $\pm 20\%$	0.230	2.50	1.70	1.50	1.20
HER1090-221M	220 $\pm 20\%$	0.290	2.05	1.35	1.40	1.08
HER1090-331M	330 $\pm 20\%$	0.430	1.65	1.15	1.10	0.880
HER1090-471M	470 $\pm 20\%$	0.690	1.30	0.950	0.870	0.690
HER1090-681M	680 $\pm 20\%$	1.08	1.10	0.780	0.700	0.550
HER1090-102M	1000 $\pm 20\%$	1.36	0.950	0.650	0.620	0.490

Inductance Measuring Condition:100kHz,1V

DC saturation allowable current:The current value which inductance decrease within 30% from the initial value

Temperature rise allowable current:The rise in temperature of core surface is within 40℃









SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
 Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
 Engineering Dept. TEL : +81 45 521 4543

The contents of this catalogue are subject to change without notice.







DC bias characteristics vs Temperature Rise Graph

— $L(25^{\circ}\text{C})$
— ΔT

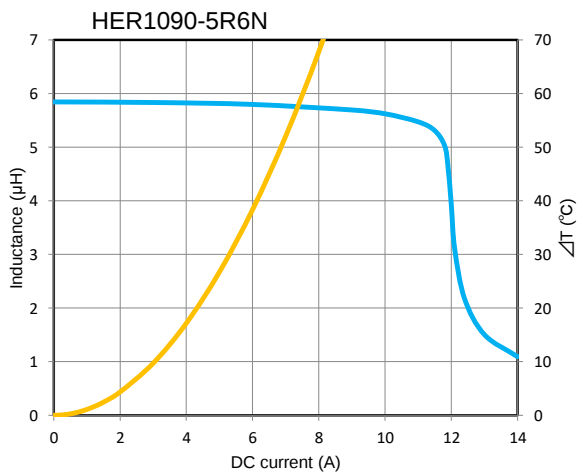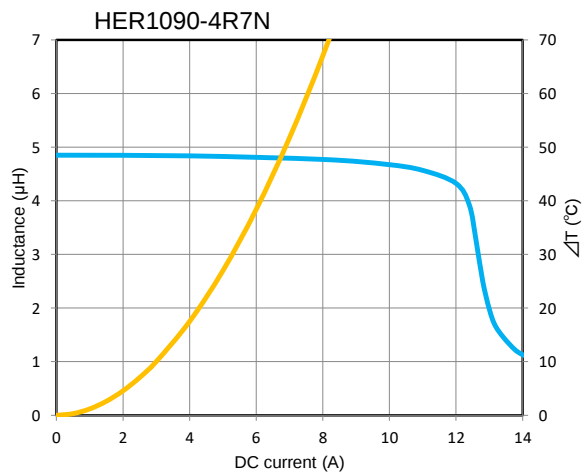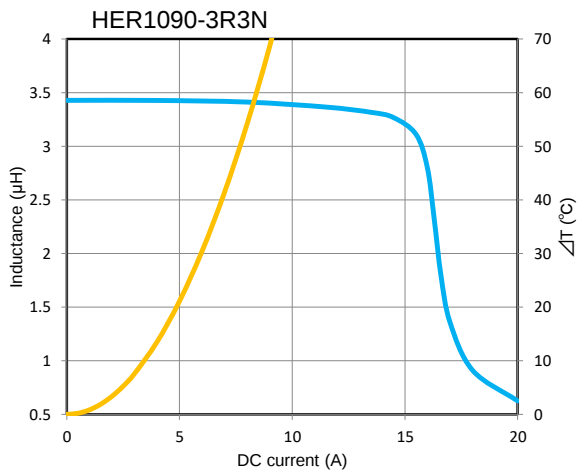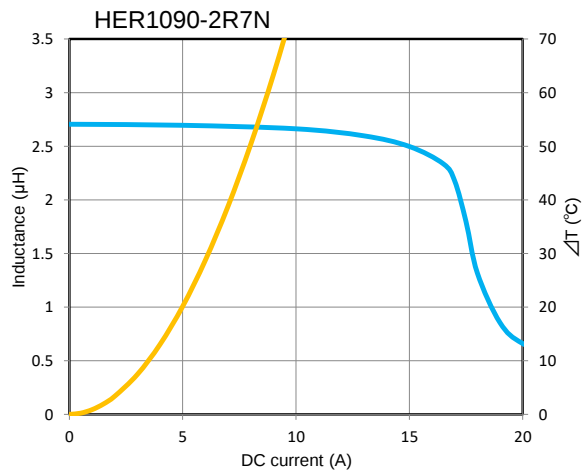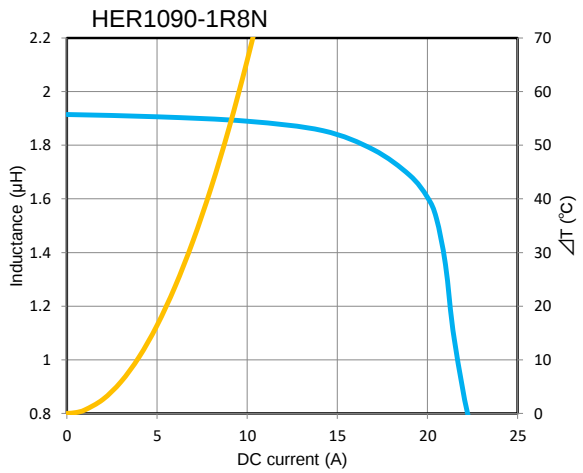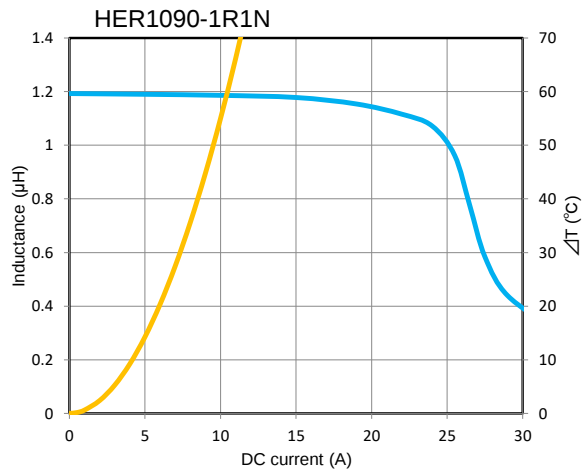







DC bias characteristics vs Temperature Rise Graph

— $L(25^{\circ}\text{C})$
— ΔT

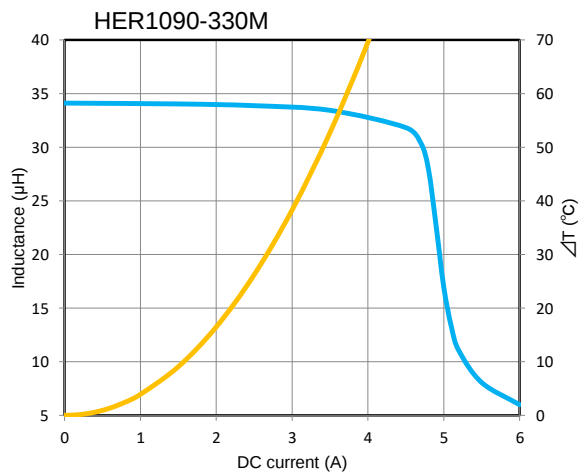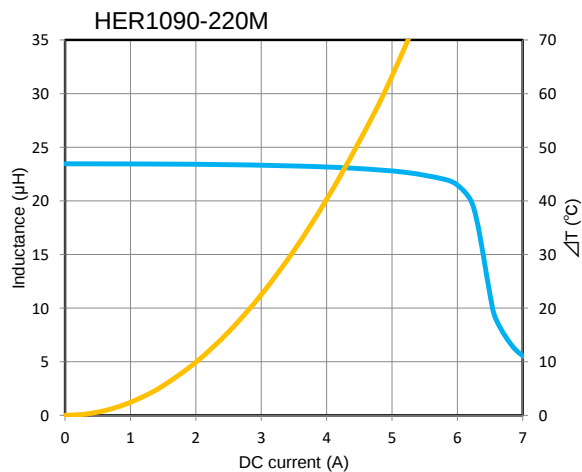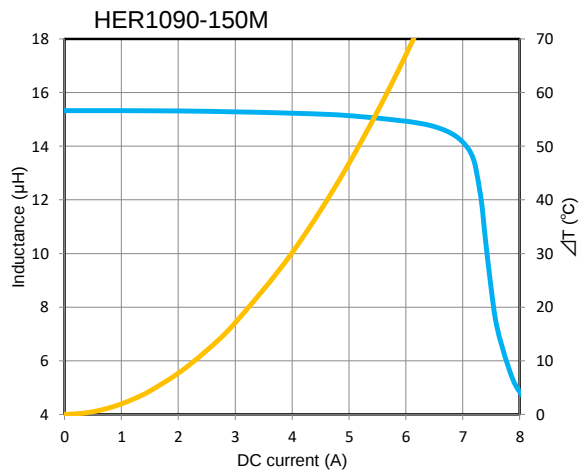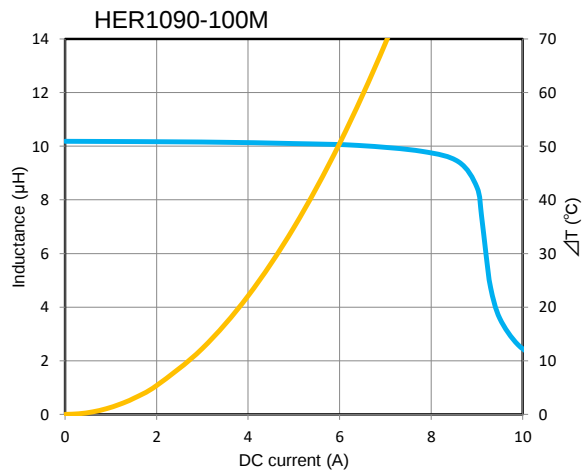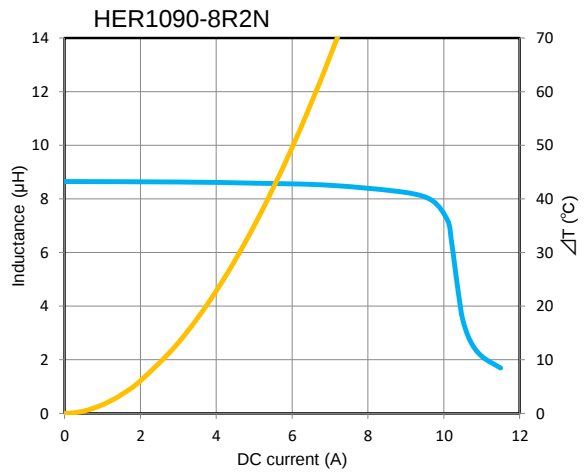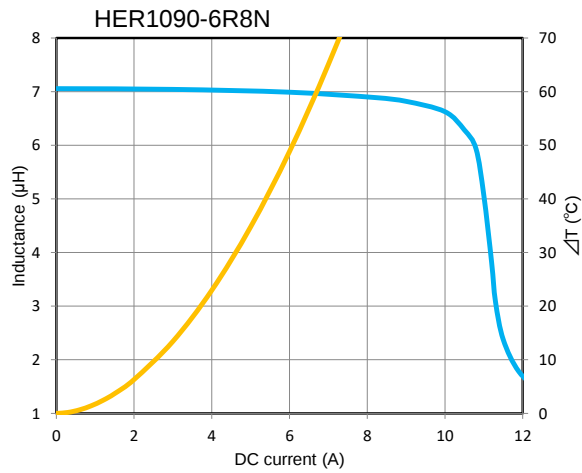

DC bias characteristics vs Temperature Rise Graph

— $L(25^{\circ}\text{C})$
— ΔT

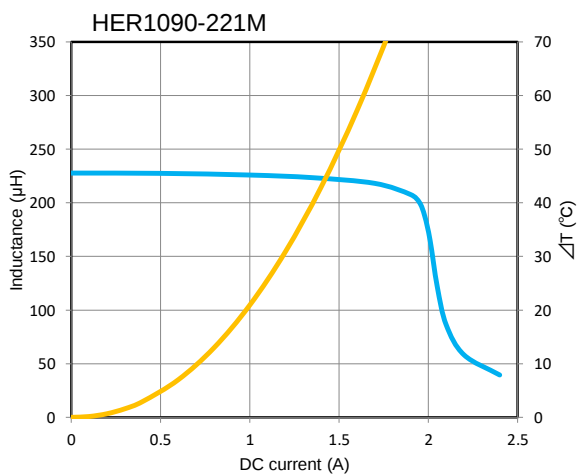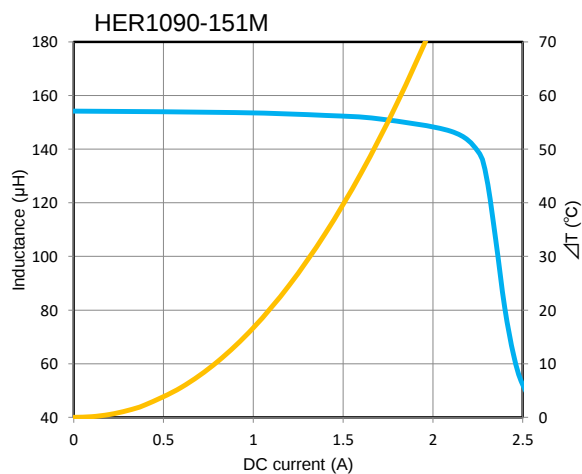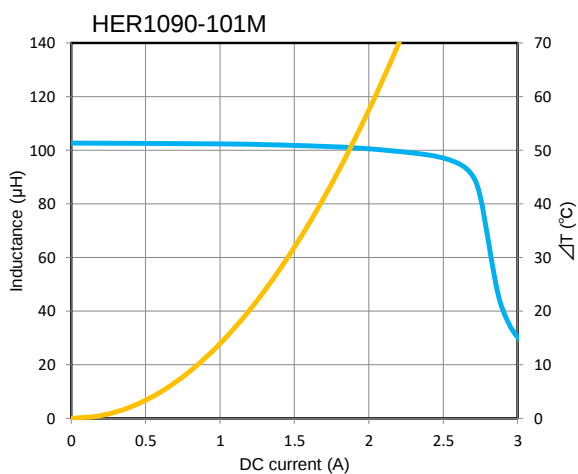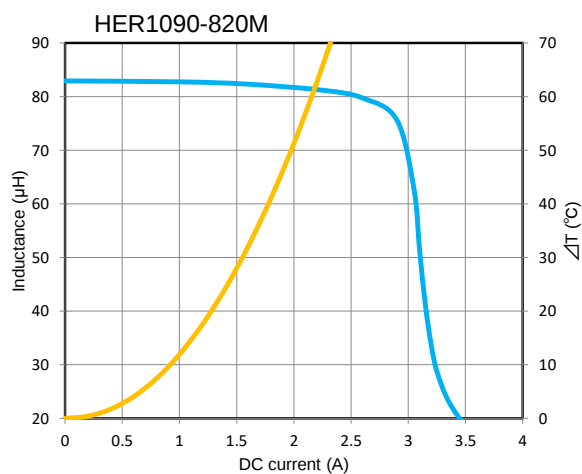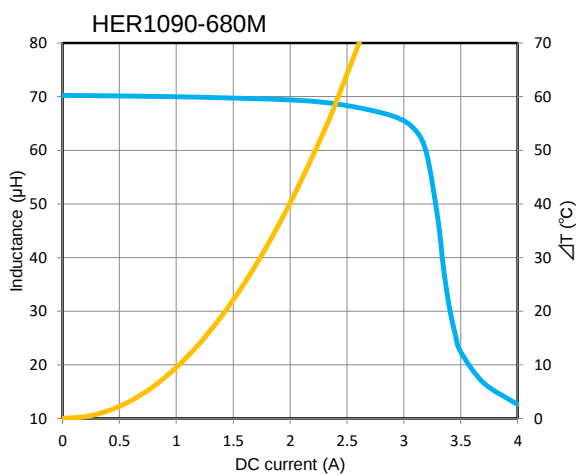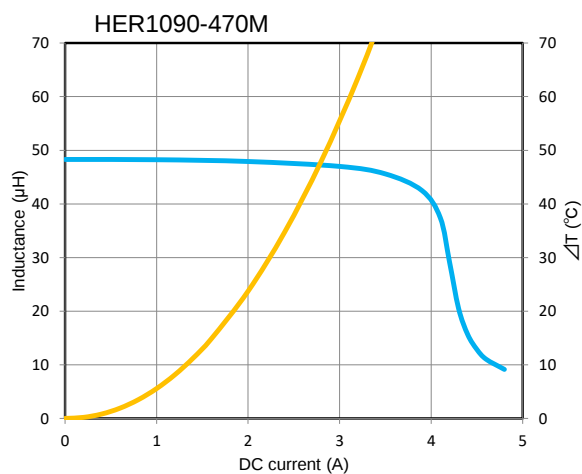

DC bias characteristics vs Temperature Rise Graph

— $L(25^{\circ}\text{C})$
— ΔT

