

HER8080



■ Features

- High current
- SMD magnetic shielded type of power inductor.
- Suitable for power supply choke coil.
- Operating temperature : -40°C~+125°C(The self-heating is included)

Magnetic structure :




Weight : 1.8 g

■ Applications


- Audio Visual/TV and Monitor, Portable Audio, Camera
- Computer & Peripheral Device/Printer(MFP), Computer
- Others/Energy, Power Supply, Transceivers, FA, Medical

■ Dimensions

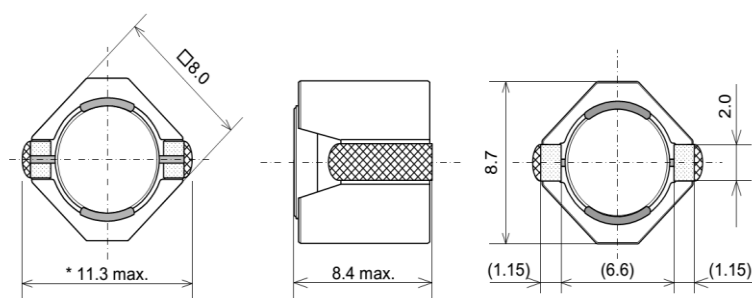

(Unit : mm)

■ Recommended Land Pattern



(Unit : mm)



SAGAMI ELEC CO., LTD.
<https://www.sagami-elec.co.jp>

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
 Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
 Engineering Dept. TEL : +81 45 521 4543

⚠ The contents of this catalogue are subject to change without notice.

■ Specifications

SAGAMI Part No.	Inductance (μ H)	DCR (Ω) $\pm 30\%$	DC Saturation Allowable Current (A)		Temperature Rise Allowable Current (A)	
			Typical	Spec	Typical	Spec
HER8080-1R5N	1.5 $\pm 30\%$	0.00700	14.5	11.5	7.73	6.30
HER8080-2R2N	2.2 $\pm 30\%$	0.00900	12.3	9.60	7.27	5.70
HER8080-2R7N	2.7 $\pm 30\%$	0.0100	10.4	7.80	6.85	5.30
HER8080-3R9N	3.9 $\pm 30\%$	0.0100	9.23	7.20	6.29	4.90
HER8080-4R7N	4.7 $\pm 30\%$	0.0140	8.00	6.10	5.89	4.60
HER8080-5R6N	5.6 $\pm 30\%$	0.0150	7.47	5.80	5.62	4.40
HER8080-6R8N	6.8 $\pm 30\%$	0.0170	6.83	5.20	5.26	4.20
HER8080-8R2N	8.2 $\pm 30\%$	0.0190	6.17	4.70	5.15	4.00
HER8080-100M	10 $\pm 20\%$	0.0200	5.60	4.20	5.08	3.80
HER8080-120M	12 $\pm 20\%$	0.0220	5.23	3.90	4.59	3.60
HER8080-150M	15 $\pm 20\%$	0.0260	4.87	3.60	4.24	3.30
HER8080-180M	18 $\pm 20\%$	0.0340	4.03	3.00	3.73	2.90
HER8080-220M	22 $\pm 20\%$	0.0500	3.70	2.90	2.95	2.40
HER8080-270M	27 $\pm 20\%$	0.0600	3.30	2.50	2.74	2.20
HER8080-330M	33 $\pm 20\%$	0.0800	3.07	2.35	2.54	2.00
HER8080-390M	39 $\pm 20\%$	0.100	2.87	2.20	2.21	1.75
HER8080-470M	47 $\pm 20\%$	0.120	2.63	2.00	1.95	1.55
HER8080-560M	56 $\pm 20\%$	0.130	2.40	1.80	1.87	1.50
HER8080-680M	68 $\pm 20\%$	0.150	2.13	1.55	1.74	1.40
HER8080-820M	82 $\pm 20\%$	0.190	1.83	1.50	1.57	1.25
HER8080-101M	100 $\pm 20\%$	0.250	1.67	1.30	1.36	1.10
HER8080-121M	120 $\pm 20\%$	0.270	1.60	1.25	1.31	1.05
HER8080-151M	150 $\pm 20\%$	0.300	1.47	1.10	1.20	1.00
HER8080-181M	180 $\pm 20\%$	0.340	1.33	1.00	1.16	0.930
HER8080-221M	220 $\pm 20\%$	0.410	1.22	0.960	1.11	0.850
HER8080-271M	270 $\pm 20\%$	0.520	1.07	0.840	0.940	0.760
HER8080-331M	330 $\pm 20\%$	0.710	0.970	0.770	0.810	0.650
HER8080-391M	390 $\pm 20\%$	0.870	0.910	0.710	0.720	0.590
HER8080-471M	470 $\pm 20\%$	1.02	0.840	0.670	0.650	0.540

Inductance Measuring Condition:100kHz,1V

DC saturation allowable current:The current value which inductance decrease within 30% from the initial value

Temperature rise allowable current:The rise in temperature of core surface is within 40°C









SAGAMI ELEC CO., LTD.
https://www.sagami-elec.co.jp

10-30, Ichibashimo-cho, Tsurumi-ku, Yokohama, Kanagawa 230-0024, Japan
Over Seas Sales Dept. TEL : +81 45 511 3141, E-mail : ossg@sagami-elec.co.jp
Engineering Dept. TEL : +81 45 521 4543

The contents of this catalogue are subject to change without notice.







DC bias characteristics vs Temperature Rise Graph

■ L(25°C) ■ ΔT

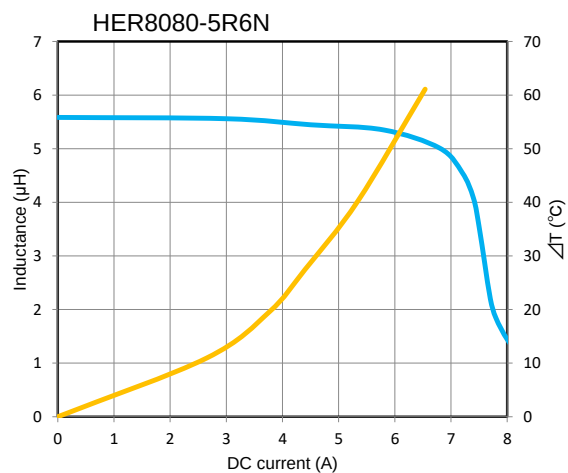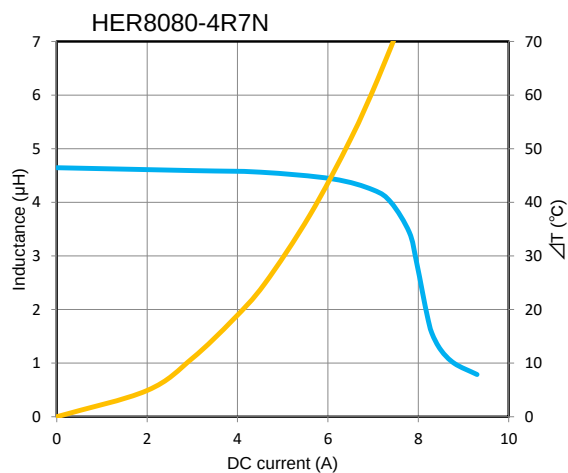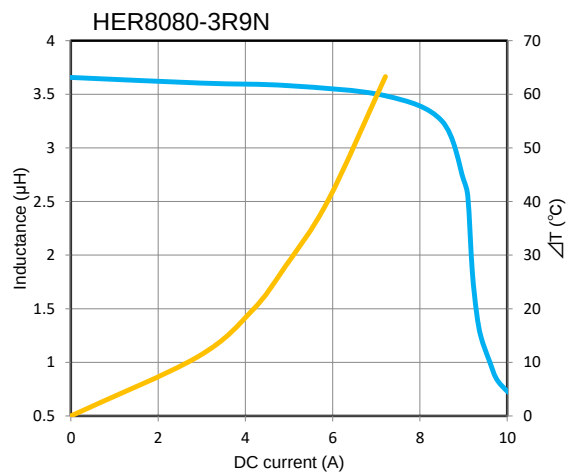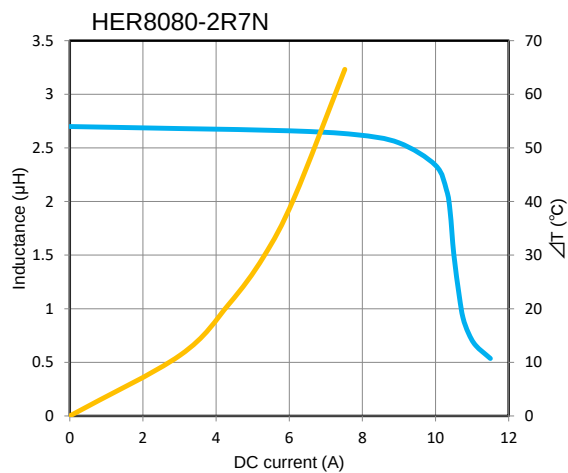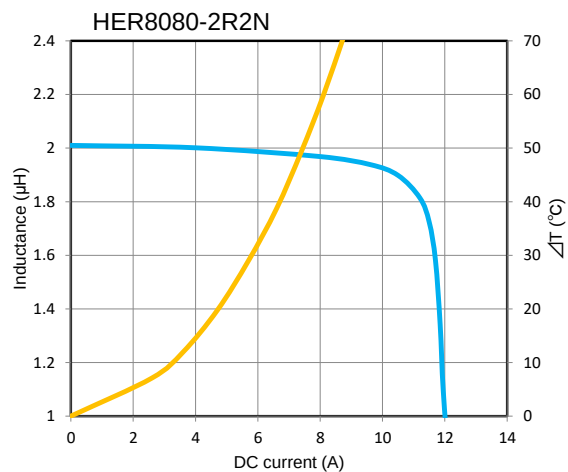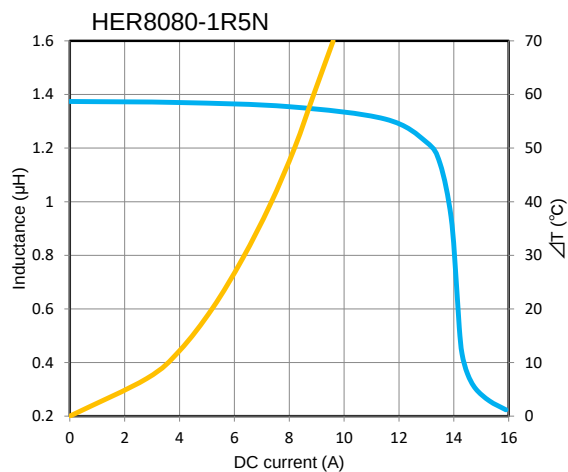

DC bias characteristics vs Temperature Rise Graph

■ $L(25^{\circ}\text{C})$ ■ ΔT

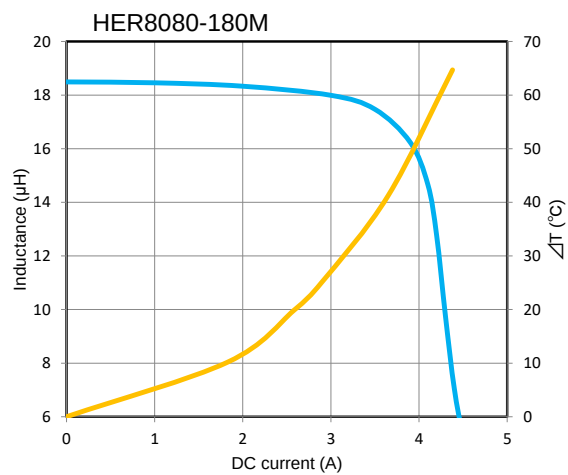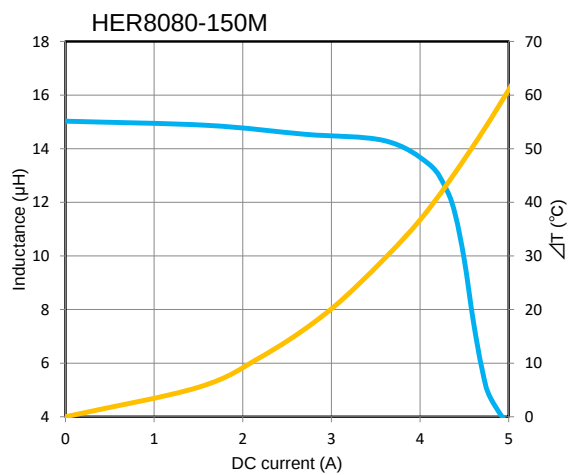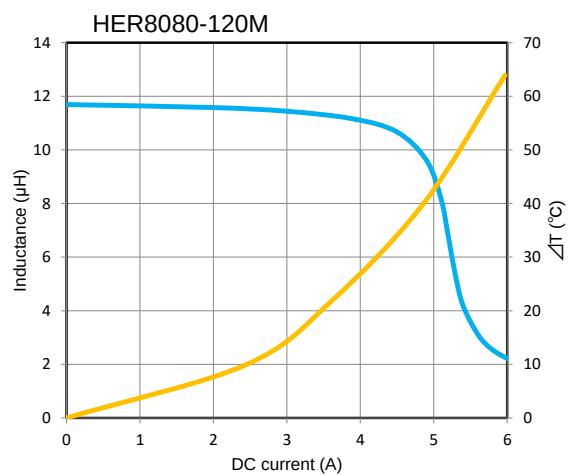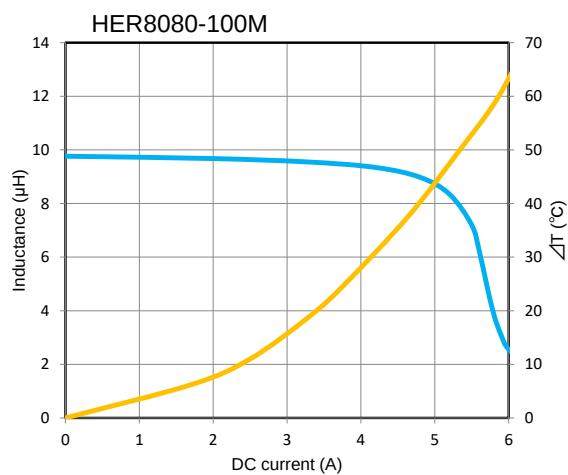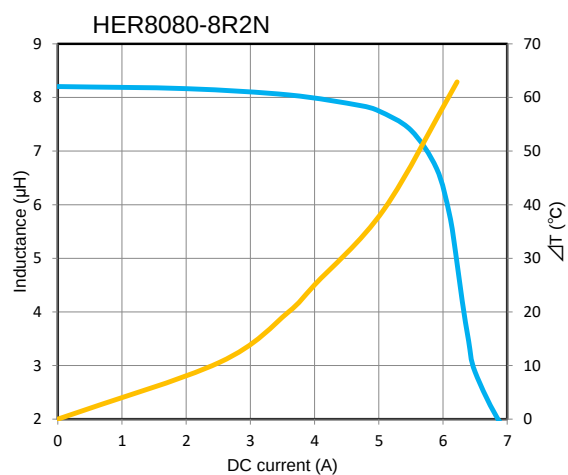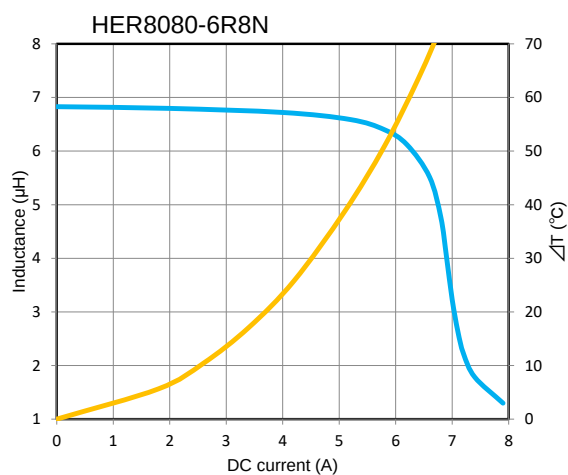







DC bias characteristics vs Temperature Rise Graph



L(25°C)









ΔT

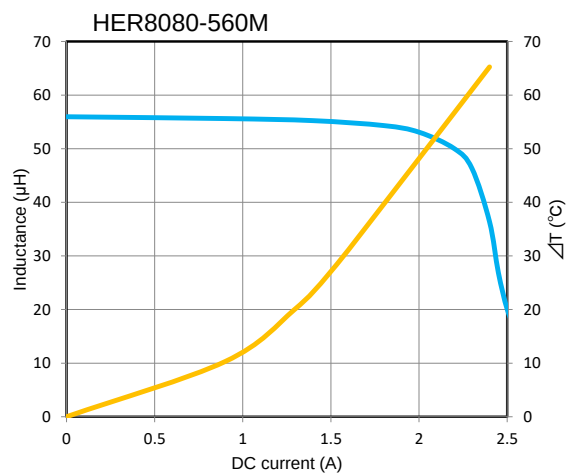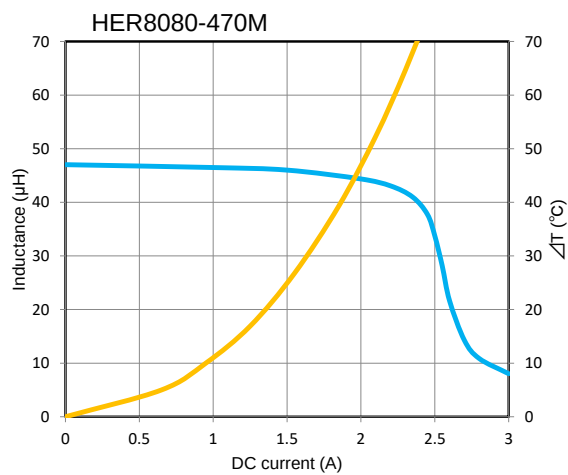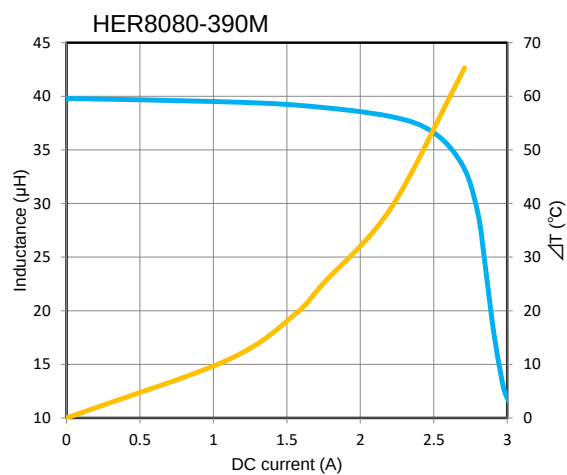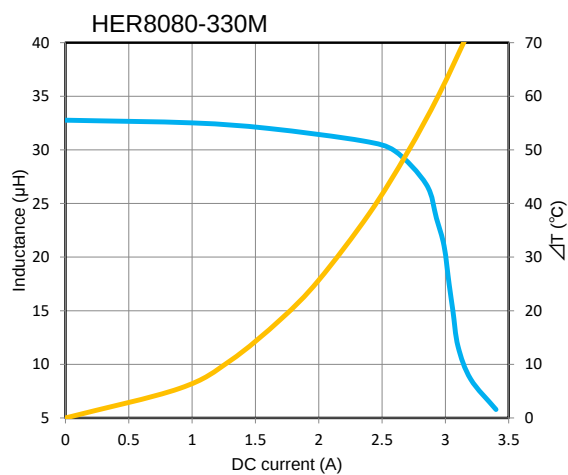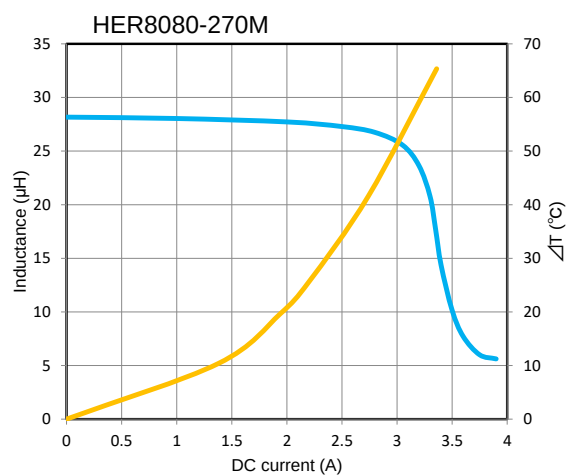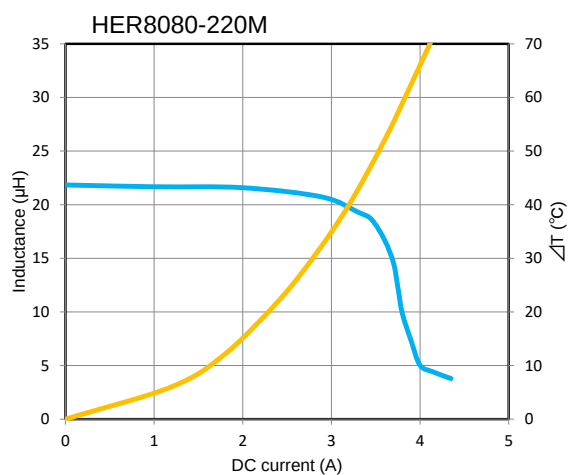

サガミ エレク株式会社
SAGAMI ELEC CO., LTD.

DC bias characteristics vs Temperature Rise Graph

■ L(25°C) ■ ΔT

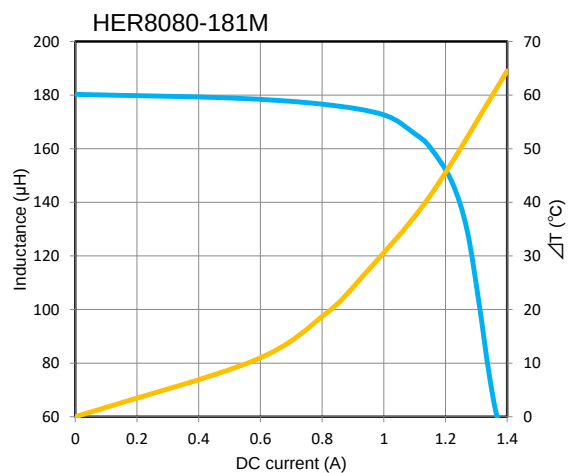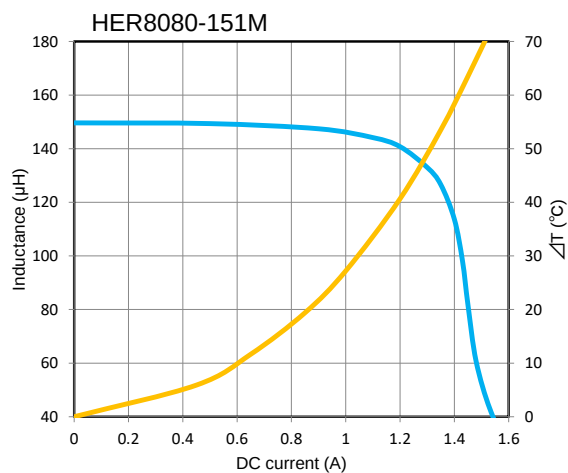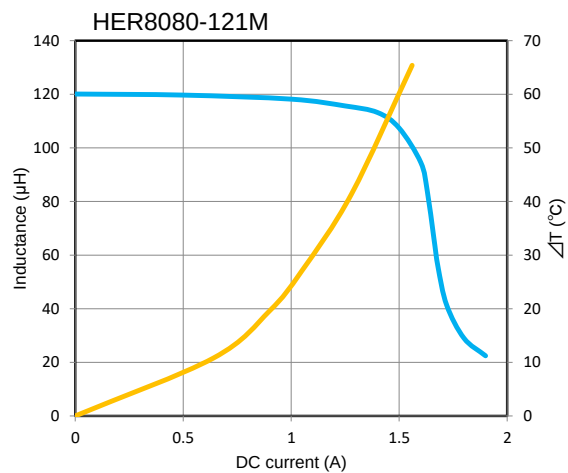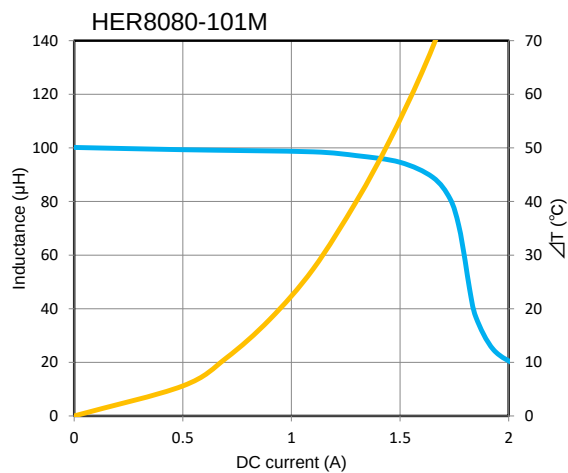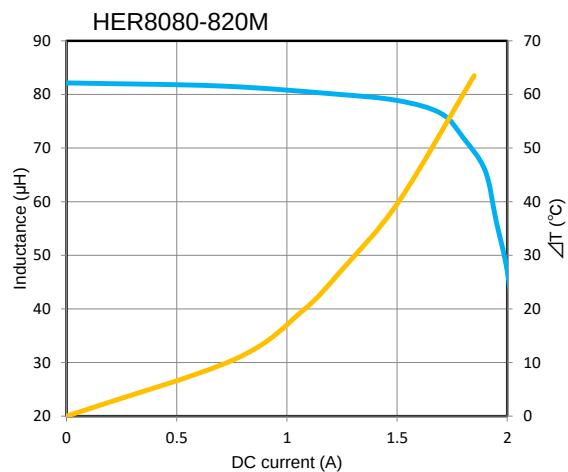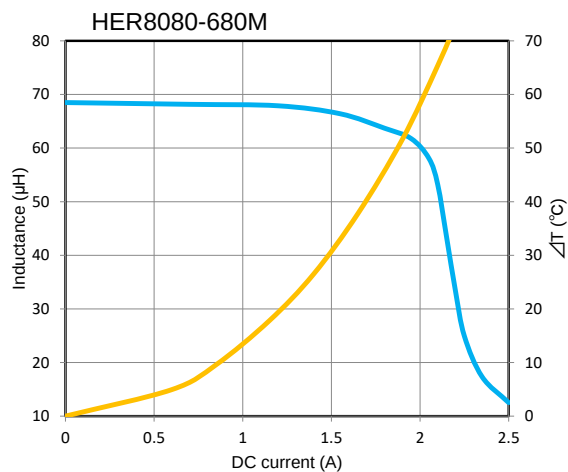

DC bias characteristics vs Temperature Rise Graph

— $L(25^{\circ}\text{C})$
— ΔT

